





ATN

NEW

ZEBRA 16 STAB

Articulating boom ZEBRA 16
Stabilisers



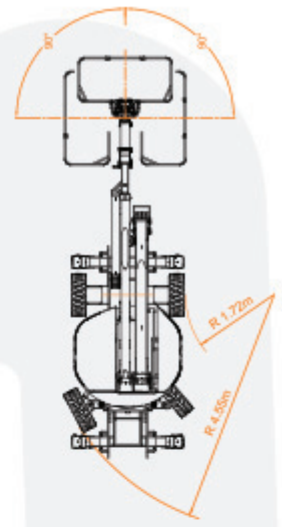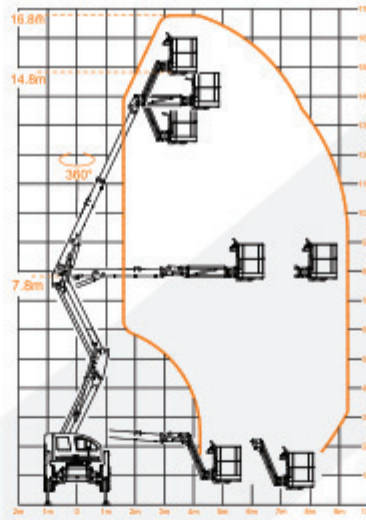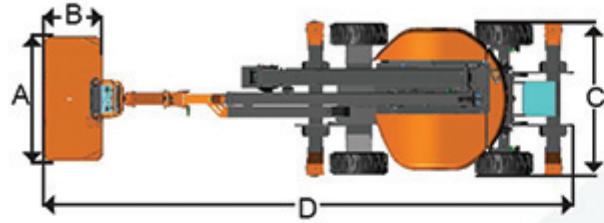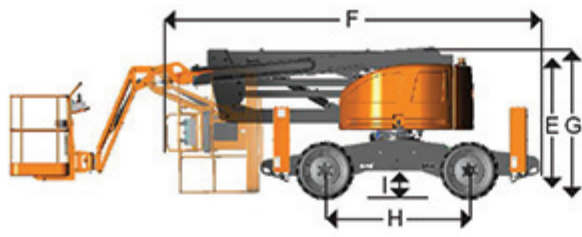

ZEBRA 16 STAB

ADVANTAGES

- Automatic self levelling outriggers
- Excellent motricity
- Speed
- Powerfull engine
- Outstanding horizontal reach
- High ground clearance
- Easy to maintain
- Designed and manufactured for heavy-duty use

STANDARD FEATURES

- 4 wheel drive
- Oscilating axle
- On-board LCD colour diagnostic screen system
- Overload sensor
- Hourmeter

OPTIONS

- 220V AC power to platform
- Air line to platform
- Catalysed particulate filter (F.A.P.)
- Anti-Crushing System (ACS)
- 2,5 KW generator
- Cold weather start kit
- Flashing light
- Motion alarm
- Motion stop when exceeding allowed tilt > 5°
- Special paint colour(s)

ZEBRA 16 STAB

	Working height	16.80 m
	Platform height	14.80 m
	Horizontal reach	9.30 m
	Lift capacity	230 m
	Up and over clearance	7.40 m
	Turntable rotation (not continue)	360 °
	Platform rotation	2 X 90 °
	Turntable tailswing	0
	Jib rotation	133 °
A	Platform width	1.80 m
B	Platform length	0.86 m
F	Length - storage	5.69 m
H	Wheelbase	2.10 m
C	Width	2.24 m
D	Length- stowed	7.70 m
E	Height - stowed	2.25 m
G	Height - storage	2.25 m
I	Ground clearance centre	0.40 m
	Turning radius - inside	1.72 m
	Turning radius - outside	44.55 m
	Tyres	33x12-20
	Drive speed - stowed	6 Km/h
	Drive speed - raised	0.9 Km/h
	Maximum tilt value	5 °
	Max.ground bearing pressure on levelling jacks	670 kN/m ²
	Diesel engine	KUBOTA
	Fuel tank capacity	60 L
	Hydraulic tank capacity	85 L
	Weight	8050 Kg
	Gradeability * - stowed	45 %
	Auxiliary power unit	12 V DC



Rue André Thevet,
Z.I.Guillaume Mon Amy Fauillet 47400 FRANCE
+33 (0) 553 798 320 +33 (0) 553 880 107
<http://www.atnplatforms.com>

