





# ZEBRA 16

Articulating boom ZEBRA 16

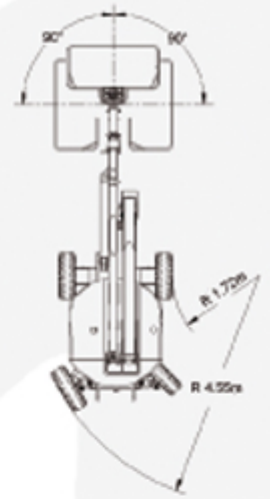

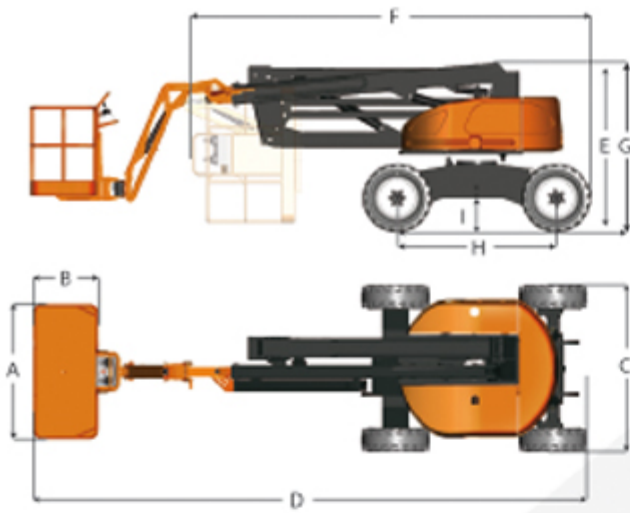

# ZEBRA 16

## ADVANTAGES OF ZEBRA 16

- Excellent motricity.
- Speed.
- Powerfull engine.
- Outstanding horizontal reach.
- High ground clearance.
- Easy to maintain.
- Designed and manufactured for heavy-duty use.

## STANDARD FEATURES

- 4 wheel drive.
- Oscilating axle.
- On-board LCD colour diagnostic screen system.
- Overload sensor.
- Hourmeter.

## OPTIONS

- **4 Wheel Steering**
- 220V AC power to platform.
- Air line to platform.
- Special paint colour(s).
- 2,5 KW generator.
- Catalysed particulate filter (F.A.P.)
- Anti crush system (A.C.S.)
- Cold weather start kit.
- Flashing light.
- Motion alarm.
- Motion stop when exceeding allowed tilt >5°
- Special paint colour(s).



	ZEBRA 16
Working height	16,40 m
Platform height	14,40 m
Horizontal reach	9,30 m
Lift capacity	230 Kg
Up and over clearance	7,40 m
Turntable rotation (not continue)	360 °
Platform rotation	2 x 90 °
Turntable tailswing	0
Jib rotation	133 °
<b>A</b> Platform width	1,80 m
<b>B</b> Platform length	0,86 m
<b>F</b> Length - storage	5,10 m
<b>H</b> Wheelbase	2,10 m
<b>C</b> Width	2,24 m
<b>D</b> Length- stowed	7,12 m
<b>E</b> Height - stowed	2,25 m
<b>G</b> Height - storage	2,25 m
<b>I</b> Ground clearance centre	0,40 m
Turning radius - inside / 4x4x4	1,72 M / 1,26 m
Turning radius - outside / 4x4x4	4,55 M / 3,32 m
Tyres	33x12-20
Drive speed - stowed	6 Km/h
Drive speed - raised	0,9 Km/h
Gradeability - stowed	45 %
Maximum tilt value	5 °
Weight / 4x4x4	7200 Kg / 7350 Kg
Diesel engine	KUBOTA
Fuel tank capacity	60 L
Hydraulic tank capacity	85 L
Max.ground bearing pressure	1422 kN/m <sup>2</sup>
Auxiliary power unit	12 V DC



Rue André Thevet,  
Z.I.Guillaume Mon Amy Fauillet 47400 FRANCE  
**+33 (0) 553 798 320 +33 (0) 553 880 107**  
<http://www.atnplatforms.com>

