



ATN

ZEBRA 12

Articulating boom ZEBRA 12

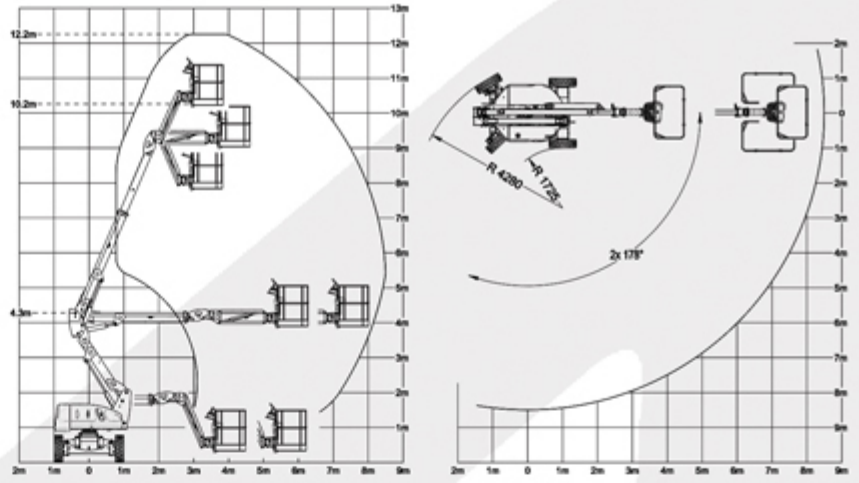

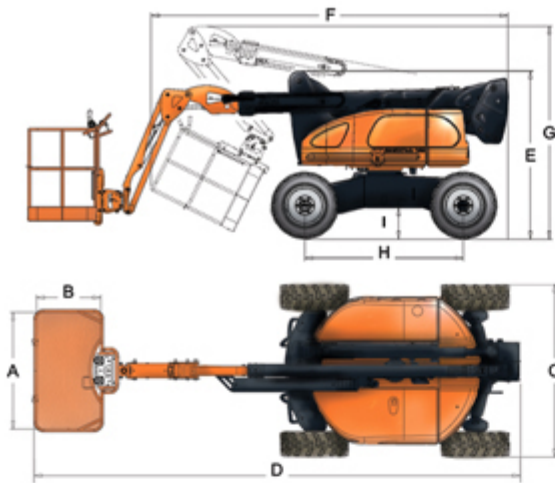

ZEBRA 12

ADVANTAGES OF ZEBRA 12

- Outstanding horizontal reach.
- High ground clearance.
- High drive speed.
- Proportional intuitive drive and lift controls.
- Easy to maintain (on-board diagnostic screen system).
- Designed and manufactured for heavy-duty use.

STANDARD FEATURES

- Oscillating axle.
- Permanent 4 wheel drive
- Overload sensor.
- Lifting facilities.
- On-board LCD colour diagnostic screen system.

OPTIONS

- 220V AC power to platform.
- Air line to platform.
- 2,5 KW generator
- Cold weather start kit
- Flashing light.
- Motion alarm.
- Catalysed particulate filter (F.A.P.).
- Anti crush system (A.C.S.).
- Motion stop when exceeding allowed tilt >4°
- Oil cooler
- Special paint colour(s).



		ZEBRA 12
	Working height	12,20 m
	Platform height	10,20 m
	Horizontal reach	8,50 m
	Lift capacity	230 Kg
	Up and over clearance	4,42 m
	Turntable rotation	2x178 °
	Platform rotation	2x90 °
	Turntable tailswing	0
	Jib rotation	133 °
A	Platform width	1,51 m
B	Platform length	0,86 m
F	Length - storage	4,50 m
H	Wheelbase	2,00 m
C	Width	1,99 m
D	Length- stowed	6,05 m
E	Height - stowed	2,10 m
G	Height - storage	2,60 m
I	Ground clearance centre	0,37 m
	Turning radius - inside	1,73 m
	Turning radius - outside	4,28 m
	Tyres	31x10-20
	Drive speed - stowed	6 Km/h
	Drive speed - raised	0,9 Km/h
	Gradeability - stowed	40 %
	Maximum tilt value	4 °
	Diesel engine	KUBOTA
	Fuel tank capacity	50 L
	Hydraulic tank capacity	48 L
	Weight	5250 Kg
	Max.ground bearing pressure	1275 kN/m ²
	Auxiliary power unit	12 V DC



Rue André Thevet,
Z.I.Guillaume Mon Amy Fauillet 47400 FRANCE
+33 (0) 553 798 320 +33 (0) 553 880 107
<http://www.atnplatforms.com>

