

Ezi-lift
PRODUCTS (AUST)
SALES·SERVICE·HIRE·PARTS

Call NOW
0488 888 EZI




**Specialising in all Aluminium products including
Ductlifts, Panellifts, Work Platforms and Scaffold.**

ABOUT EZI-LIFT

The EZI-LIFT product offers a strong reliable EZI to use range of equipment designed for all aspects of lifting from a few feet off the ground such as a cabinetry job or T.V installation through to jobs up to 25 feet off the ground including air-conditioning duct installation or structural beam setting. All EZI-LIFT lifts are engineered with a stowed height of under 2.0 metres so it will fit under all doorways and almost anywhere else. Sturdy 10 inch rubber wheels supported by 3 inch steel caster wheels offer exceptional manoeuvrability even in the tightest area's.

ONE TOUCH OUTRIGGERS

Simple and easy to release with the touch of a finger.

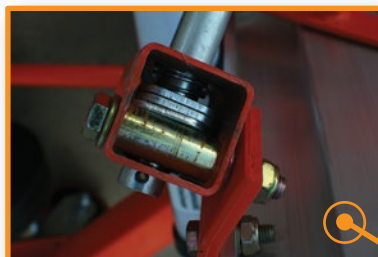

REVERSIBLE FORKS

Reinforced steel forks are easily reversed for ease of use or tricky to reach places.




DIRECTIONAL WHEEL LOCKS & INTEGRATED WHEEL BRAKES

Engineered steel casters ensure longevity in the harshest environments and include directional locks for ease of movement and integrated foot brake.



Designed for ease of use which means NO TOOLS are required for setup, use or pack up.

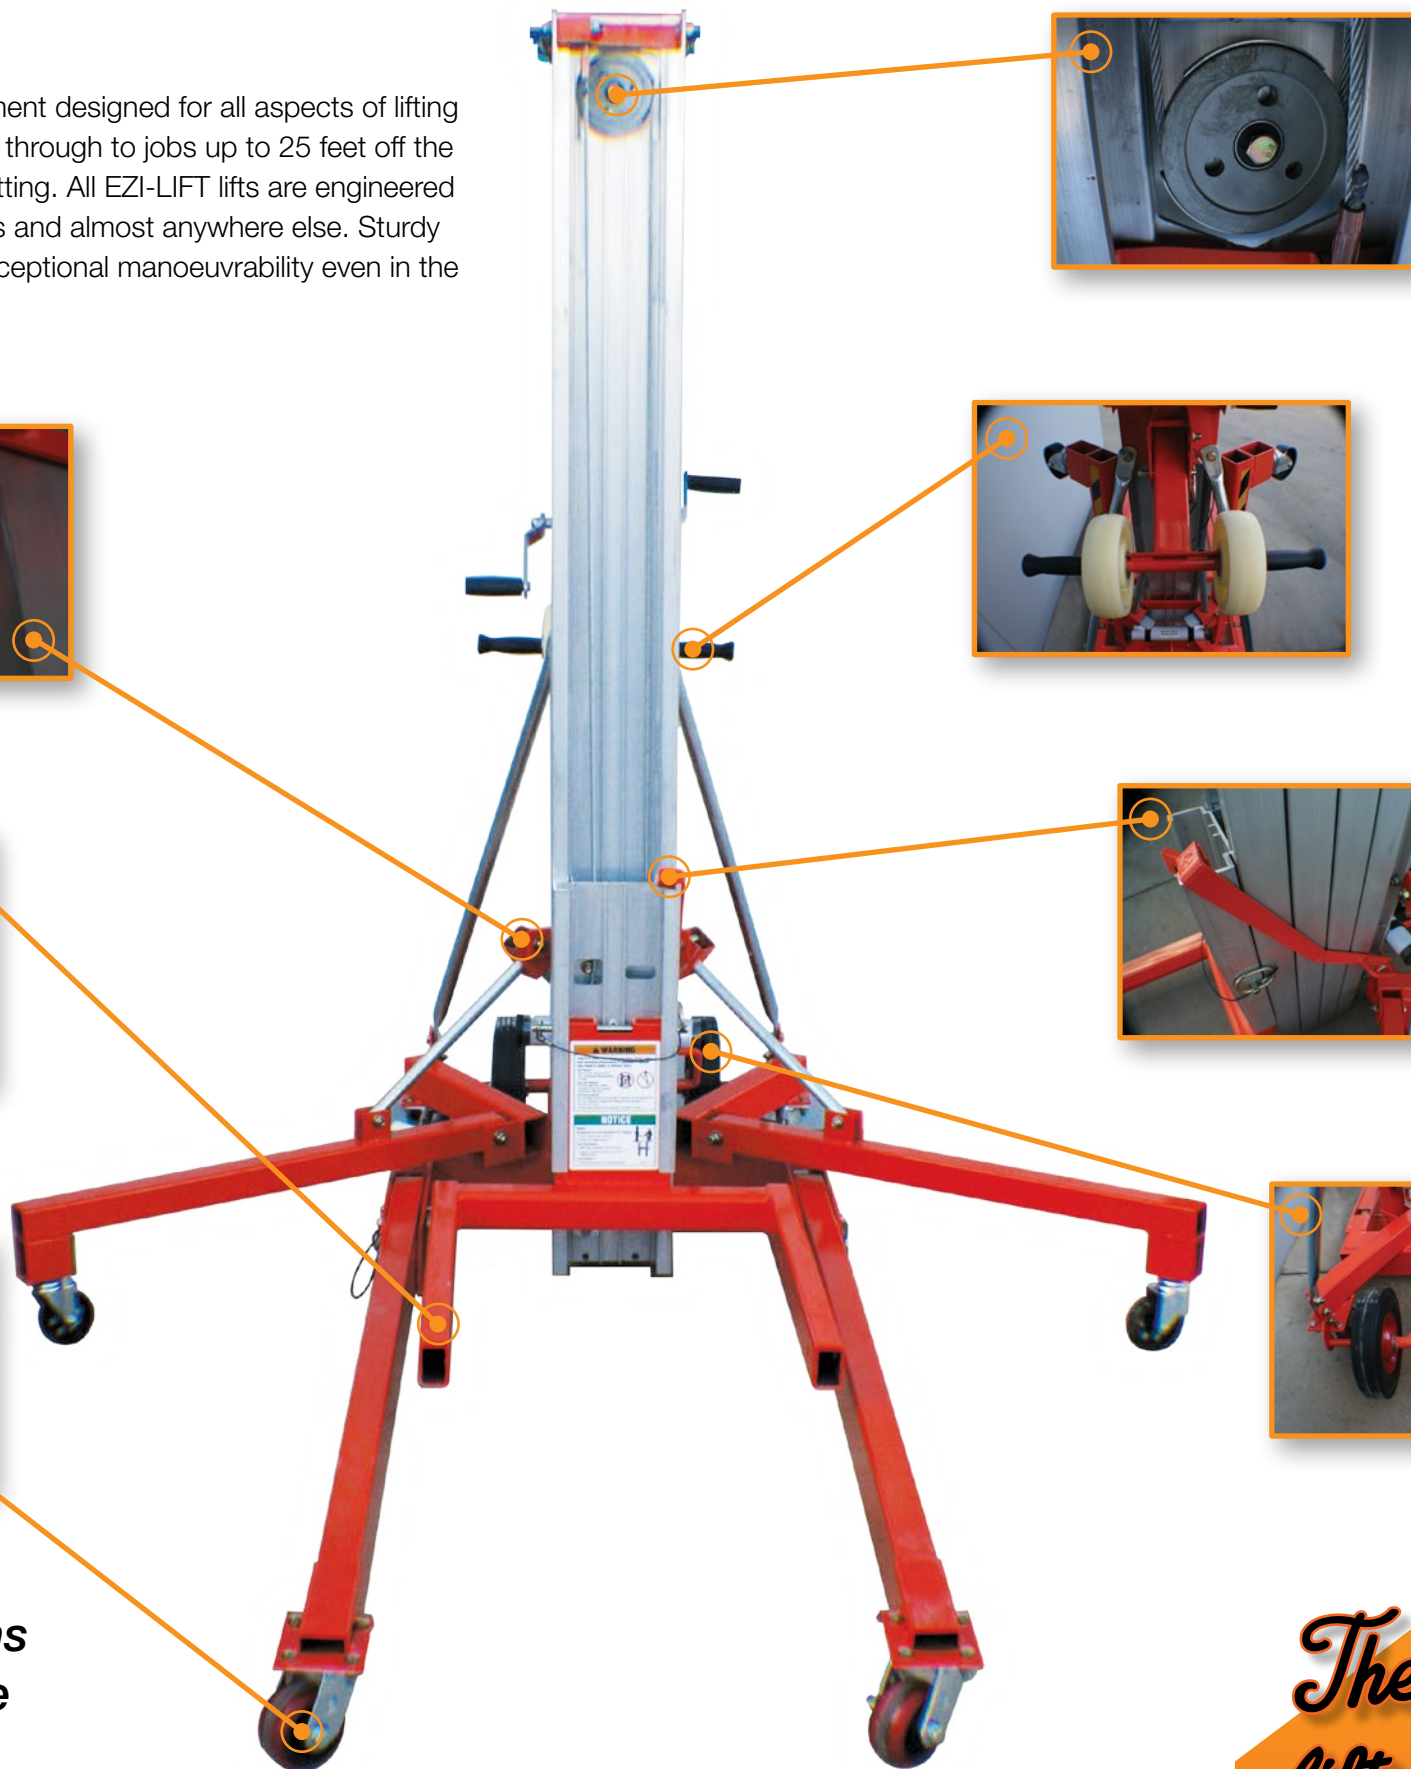

ALUMINIUM PULLEYS

Cast aluminium pulleys ensure maximum lifespan of componentry unlike cheaper plastic imitations.



LOADING WHEELS

High-density polyethylene (HDPE) wheels ensure ease of loading and unloading into vehicles whilst minimising component scratching or damage.



TRANSPORT BRAKE

Transport brake standard on all models to ensure that the EZI-LIFT works first time after transportation.



SOLID WHEELS

Large 10 inch wheels for ease of movement on all surfaces



*The **EZI** way to lift what you want, when you want!*

Specifications

Load Handling Attachment	ALP-10		ALP-15		ALP-20		ALP-25	
	US	METRIC	US	METRIC	US	METRIC	US	METRIC
Height-Stowed	78 1/2 in	2m	78 1/2 in	2m	78 1/2 in	2m	78 1/2 in	2m
Width / Standard Base	31 1/2 in	80cm	31 1/2 in	80cm	31 1/2 in	80cm	31 1/2 in	80cm
Width-stabilisers lowered / Standard Base	78 5/8 in	2m	78 5/8 in	2m	78 5/8 in	2m	78 5/8 in	2m
Width-Min / Straddle Base	31 1/2 in	80cm	31 1/2 in	80cm	N/A	N/A	N/A	N/A
Width-Max / Straddle Base	58 in	1.5m	31 1/2 in	80cm	N/A	N/A	N/A	N/A
Length-Stowed	29 in	74cm	29 in	74cm	29 in	74cm	31 in	79cm
Length-Operating	59 1/2 in	1.7m	72 1/2 in	1.8m	80 1/2 in	1.8m	80 1/2 in	2m
Ground Clearance	2 in	50.8mm	2 in	50.8	2 in	50.8	2 in	50.8
Load Capacity at 18 inch/46cm load centre	661 lbs	300 kg	661 lbs	300 kg	661 lbs	300 kg	650 lbs	295 kg
Net Weight-Standard Base	359 lbs	163 kg	403 lbs	183 kg	447 lbs	203 kg	491 lbs	223 kg
Net Weight-Straddle Base	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Dimension	Fork Position	ALP-10		ALP-15		ALP-20		ALP-25	
		US	METRIC	US	METRIC	US	METRIC	US	METRIC
Standard Forks	Forks Down	9 ft 9 in	3m	14 ft 7 1/2 in	4.5m	19 ft 6 in	6.0m	24 ft 4 in	7.5m
	Forks Up	11 ft 5 1/2 in	3.5m	16 ft 4 in	5m	21 ft 2 1/2 in	6.5m	26 ft 1/2 in	8.0m
Adjustable Forks	Forks Down	9 ft 9 in	3m	14 ft 7 1/2 in	4.5m	19 ft 6 in	5.9m	24 ft 4 in	7.4m
	Forks Up	11 ft 5 1/2 in	3.5m	16 ft 4 in	5m	21 ft 2 1/2 in	6.5m	26 ft 1/2 in	7.9m
Flat Forks	N/A	9 ft 9 in	3m	14 ft 7 1/2 in	4.5m	N/A	N/A	N/A	N/A
Boom Note: Measured from ground to bottom of shackle	N/A	10 ft 9 in	3.3m	15 ft 7 1/2 in	4.8m	20 ft 6 in	6.2m	24 ft 4 in	7.4m
Vertical Barrel Stacker Note: Measured from ground to bottom of barrel	30 gallon	8 ft 10 in	2.7m	13 ft 9 in	4.2m	N/A	N/A	N/A	N/A
	55 gallon	8 ft 8 in	2.6m	13 ft 7 in	4.1m	N/A	N/A	N/A	N/A
Vertical Barrel Handler Note: Measured from ground to bottom of barrel	55 gallon	8 ft 8 in	2.6m	13 ft 7 in	4.1m	N/A	N/A	N/A	N/A
	30 gallon	3 ft 10 in	2.6m	13 ft 7 in	4.1m	N/A	N/A	N/A	N/A
Load Platform Note: Can be used with standard forks and adjustable forks only	Forks Down	9 ft 9 in	3m	14 ft 7 1/2 in	4.5m	19 ft 6 in	6m	24 ft 4 in	7.4m
	Forks Up	11 ft 5 1/2 in	3.5m	16 ft 4 in	5m	21 ft 2 1/2 in	6.5m	21 ft 1/2 in	7.9m

Pipe Cradle Option - Handles round objects up to 30 in / 76 cm in diameter - Note: Can be used with standard forks and adjustable forks only (See above for working heights)

Non-marking fork Option - Note: Can be used with standard forks and adjustable forks only (See above for working heights)

Fork Extension Option - Adds 6 1/4 to 25 inches / 15 to 64 cm of length to forks - Note: Can be used with standard forks and adjustable forks only (See above for working heights)

Attachment Options



Platform Attachment



Pipe Rack Attachment



Fork Extension & Jib Attachment