

# SERIES 2200 LIL' HOISTER LIFT

**SUMNER**  
Sumner Manufacturing Co, Inc.

## Lightweight, Transportable ... Ideal For Many Lifting Tasks!

**Fold-out Roller Wheels**  
Great for rolling lift in and out of vans and trucks

**1" Nylon Strap**  
No more cable kinks. Strap feeds away from operator – no more cable in the face

**Dual I-beam Mast Design**  
Compact, light weight but strong.

**Reversible Forks**  
Two plunger pins permit quick release of forks. Forks may be removed for storage or reversed for added height.

**Convenient Handle**  
Enables use as a hand truck

**Two Speed Winch Handle**  
Allows the operator to raise and lower loads at standard speed or at high speed (less than half the time of standard).

**Mast Braces**  
For extra strength and support

**Mast Hold Down**  
Heavy duty spring clamps fasten the strap to the side of the fork assembly.

**8" Non-marring wheels**

**Double Row Casters**  
Two 2" (5 cm) casters permit easy handling of heavy loads.

**CE**

**Remove forks and remove and reverse handle for space saving storage!**

### JUST A FEW OF THE APPLICATIONS FOR THE LIL' HOISTER:

- HVAC compressor installation
- Loading & unloading service vehicles
- Cabinet installation
- Lifting electrical trays
- Positioning pipes & ducts
- Installing air conditioners
- Handling machine parts & tooling
- Loading equipment in rental yards
- Hoisting small beams
- Positioning hospital TVs
- Hauling & lifting cement bags
- Installing appliances
- Removing electrical motors
- Installing light fixtures

Part No.	Description	Max Height		Lifting Capacity		Basic Weight	
		Feet	Meter	lb	kg	lb	kg
784308	2208 Lil' Hoister	9' 1/4"	2.4	300	135.0	95	43.2
784310	2210 Lil' Hoister	11' 1/4"	3.0	300	135.0	108	49.0

 MADE IN USA

# SERIES 2200 LIL' HOISTER LIFT




**Legs Extend  
for Greater  
Stability**

Plunger pin  
action allows  
quick adjustment.



## OPTIONAL FEATURES AVAILABLE FOR SERIES 2200 LIFTS

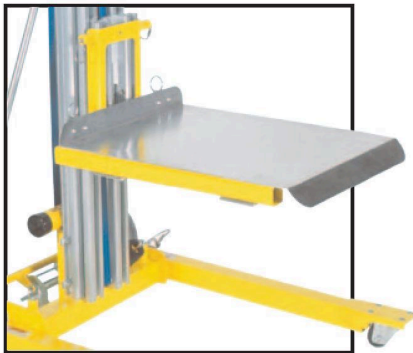

### Aluminum Tray (Part No. 784240)

Lightweight and rust free, this aluminum tray slides on to forks and attaches quickly and safely with spring loaded plunger pins.



### Wheel Brake Kit (Part No. 784218)

Easy to assemble brake kit for 8" (20 cm) wheels prevents lift from moving while being loaded. Recommended for use with the aluminum tray.



### Dually Wheel Kit (Part No. 784258)

Ideal for traveling on grass or dirt and when the lift is used as a hand truck.

Series 2200 Lil' Hoister Lift Dimensions	2208		2210	
Maximum height (forks up)	9' 1/4"	2.7 m	11' 1/4"	3.4 m
Maximum height (forks down)	8' 0"	2.4 m	10' 0"	3.0 m
Lift Capacity	300 lbs	135 kg	300 lbs	135 kg
Height Stowed	57"	1.4 m	5' 10"	1.8 m
Length Stowed	13"	33 cm	13"	33 cm
Length Operating	41"	1.0 m	41"	1.0 m
Width Stowed	26"	66 cm	26"	66 cm
Width Max	31"	79 cm	31"	79 cm
Winch cranks per ft/m	8	24	8	24
Basic weight	95 lbs	43.2 kg	106 lbs	48 kg

2208



2210

**Ezi-lift**  
PRODUCTS (AUST)  
SALES-SERVICE-HIRE-PARTS